


Till-Rite

T30 - T40 - T50 - T60 - T70

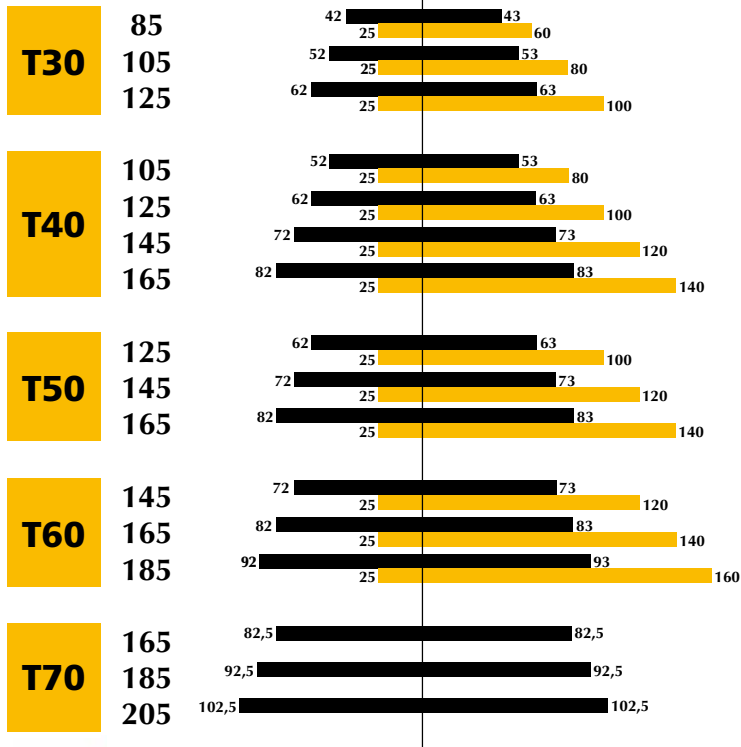

Till-Rite

	MOD.	HP	cm	cm	kg	r.p.m.	N°	N°	mm	cm		1 3/8"
T30	T30-234	16-30	85	100	140	205	4	16	180	60	14-16	ASAE 2° CAT
	T30-242	20-30	105	120	160		5	20		80		
	T30-250	25-30	125	140	175		6	24		100		
T40	T40-242	18-40	105	120	170	231/375	5	20	180	80	11-14	ASAE 3° CAT
	T40-250	25-40	125	140	190		6	24		100		
	T40-258	30-40	145	160	210		7	28		120		
	T40-266	32-40	165	180	240		8	32		140		
T50	T50-250	25-50	125	140	210	226/383	6	24/36	210	100	10-13	ASAE 4° CAT
	T50-258	30-50	145	160	230		7	28/42		120		
	T50-266	35-50	165	180	250		8	32/48		140		
T60	T60-258	30-60	145	165	300	221	7	28/42	220	120	12-14	ASAE 6° CAT
	T60-266	35-60	165	185	325		8	32/48		140		
	T60-274	40-60	185	205	350		9	36/54		160		
T70	T70-266	30-70	165	185	335	221	8	32/48	220		12-14	ASAE 6° CAT
	T70-274	35-70	185	205	360		9	36/54				
	T70-282	40-70	205	225	385		10	40/60				